



# Installed Insulation Statement



Contractor: \_\_\_\_\_ Phone Number: \_\_\_\_\_


Installer: \_\_\_\_\_ Installation Date: \_\_\_\_\_

Jobsite Address: \_\_\_\_\_

Permit Number: \_\_\_\_\_

Location of Insulation	Manufacturer	Mass Insulation R-Value	HY-Fi R-Value	Total R-Value	Approx. Sq. Ft.
Walls					
Garage Ceiling under Living Area					
Other					

Certified by a third party testing and inspection service (R&D Services, Inc.), HY-Fi Reflective Insulation has more than 28 percent recycled content, with at least 25 percent being post-consumer content.

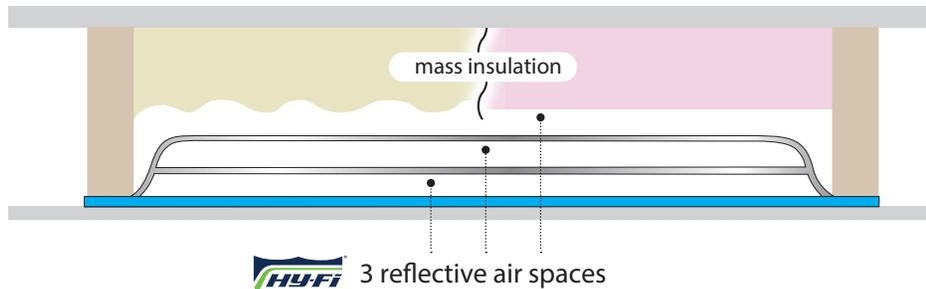

For HY-Fi Product information, <http://www.fifoil.com>

Table 1: R-Values for Hybrid Wall Insulation in a 2 inch by 4 inch Cavity

R Value / Inch for Mass Insulation*	2 Inches of Mass Insulation	R for HY-Fi	R Total	R Rounded**
6.00	12.0	7.2	19.2	19
6.25	12.5	7.2	19.7	20
6.50	13.0	7.2	20.2	20
6.75	13.5	7.2	20.7	21

Table 2: R-Values for Hybrid Wall Insulation in a 2 inch by 6 inch Cavity

R Value / Inch for Mass Insulation*	4 Inches of Mass Insulation	R for HY-Fi	R Total	R Rounded**
3.0	12.0	7.2	19.2	19
3.4	13.6	7.2	20.8	21
3.8	15.2	7.2	22.4	22
4.2	16.8	7.2	24.0	24

